RBK RELAY MODULES

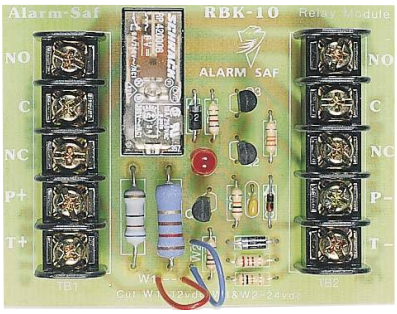

The RBK family of relay modules provides a proven, reliable means of connecting an auxiliary relay into a new or existing system without need for soldering or drilling within the control panel. The relay board has an LED for indication of relay activation and is constructed of a high grade fiberglass board. The sensitive relay modules are available in a low current trip version, capable of accepting a trip voltage of 3-48VDC (positive) or a ground or open collector (negative) while powered from any compatible operating voltage. Units are available with snaptrack mounting.

DIMENSIONS

Board Size

- RBK
  - 2.12"L x 2.75"W x 0.87"H
  - 5.39cm x 6.98cm x 2.22cm
- RBK-5
  - 1.87"L x 2.75"W x 1.00"H
  - 4.76cm x 6.98cm x 2.54cm
- RBK-10
  - 2.50"L x 3.25"W x 1.00"H
  - 6.35cm x 8.25cm x 2.54cm

FEATURES

- LED Indicator
- Snap Track Compatible Mounting
- Small Size
- Saves Installation Time
- Quick Connect Terminals
- Double Stick Tape Mounting

ORDER INFORMATION

Order #	Order # w/ Snaptrack	Model Number	Contact Rating	Operating Voltage	Operating Current	Sensitive Trip Current
00702	**00710**	RBKS-124P	1A @ 30VDC	12, 24VDC	25 mA	0.2 mA 3-48V pos. trip
00703	**00711**	RBKS-124N	1A @ 30VDC	12, 24VDC	25 mA	0.2 mA ground trip
00704	**00712**	RBK-124AC	1A @ 30VDC	12, 24VAC,DC	25 mA	
00705	**00713**	RBK-624	1A @ 30VDC	6, 12, 24VDC	25 mA	
00706	**00714**	RBK-5	5A @ 30VDC	12, 24VDC	44 mA	
00707	**00715**	RBK-10	10A @ 30VDC	6, 12, 24VDC	88 mA	
00708	**00716**	RBKS-10	10A @ 30VDC	6, 12, 24VDC	88 mA	0.2 mA pos. or neg. trip

AlarmSaf 6 Ledgerock Way, Unit 7, Acton, MA 01720, USA, 978.658.6717, **www.alarmsaf.com**

52-128, 03/2024

RBK-624

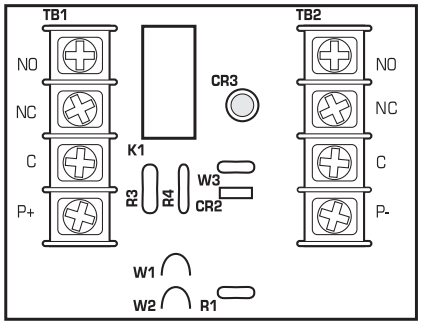

RBKS-10

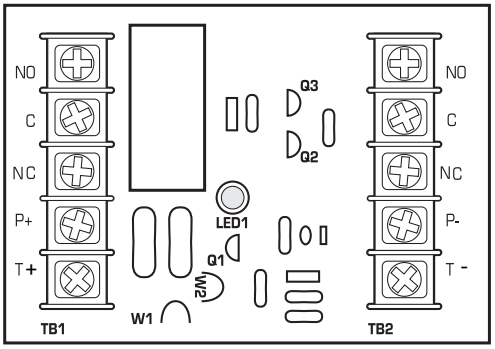

RBKS-124N

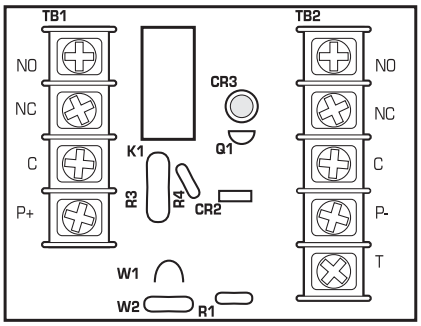

RBKS-124P

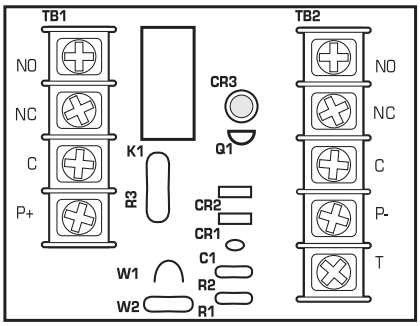

RBK-124AC

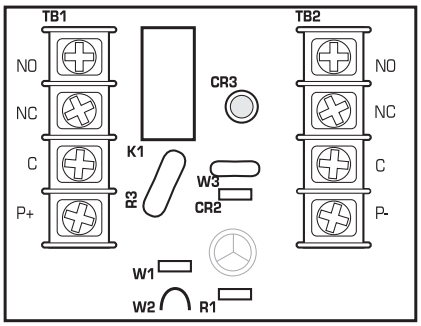

RBK-5

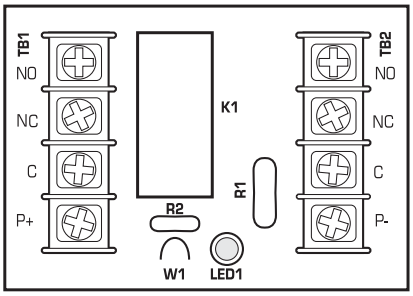

RBK-10

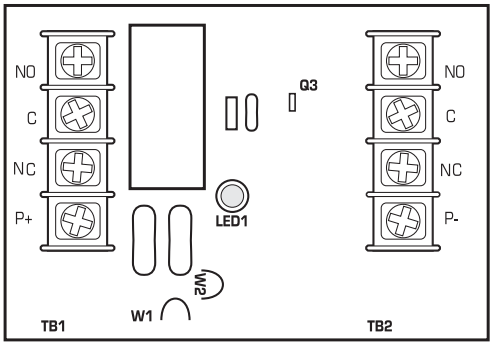

GENERAL NOTES:

- Contact protection should be considered when switching inductive loads.
- Caution should be excercised when switching greater than 30 volts with these units.
- Install in accordance with all applicable electrical codes.
- P - refers to the common return for a positive voltage in all cases of DC activation or power.
- All contact notation refers to the relay in an unpowered state.
- An illuminated LED indicates the relay is in an active condition.

ALARM SAF 6 Ledgerock Way, Unit 7, Acton, MA 01720, USA, 978.658.6717, **www.alarmsaf.com**

52-128, 03/2024