

AVR-HN532E2N-FD

32 CH. 4K UHD NETWORK VIDEO RECORDER



H.265 4K UHD NETWORK VIDEO RECORDER

12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P

DUAL NIC / NON-POE NVR

FUNCTION

- Supports up to 32 Channels 12MP / 8MP / 5MP / 4MP / 3MP / 1080P 960P / 720P IP Camera video input
- Supports H.265 High Profile Compression with Up to 50% Savings in bandwidth over H.264
 - Intuitive and User-Friendly Graphic User Interface (GUI)
 - True 4K HDMI Output
- Multi-Mode Recording: Manual / Scheduled / Motion & Sensor
 - Playback: 16 Channels Simultaneous Playback
- Search: Time Slice, Time, Event, Tag, Smart and Target Database Search
 - Supports Facial Detection and Comparison
- Supports Multiple Video Analytics, such as Missing or Abandoned Object, Region Intrusion, Tripwire, Video Tampering, etc.
 - Supports POS Information Overlay on Live View and Playback
 - Supports Hardware RAID: RAID0, 1, 5, 6, 10
- Quick and Easy Backup via USB, Network and Mobile App
- Pentaplex Operation : Live View, Record, Playback, Backup and Remote Access
 - Supports DHCP, DDNS, PPPoE and various other Network Protocols
 - Compatibility with a Variety of 3rd-Party IP Cameras including ONVIF, Hikvision, and Others
- Remote Access via Web Interface or AVYCON CVMS : Live View, Playback, Backup, PTZ, and System Configuration
- Dual Stream Technology allows for High Quality Local Recordings and Standard Quality Video for Mobile and Remote Access
 - Allows Simultaneous Online Users to Access Device
- Support PTZ Preset and Auto-Cruise, with Up to 255 Presets and 8 Cruise Paths
- Support NAT Function and QR Code Scanning by Mobile Apps, Eliminating the Need to Configure Port Forwarding
 - Powerful Mobile Apps on iOS and Android



AVYCON[®]


Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

AVR-HN532E2N-FD

32 CH. 4K UHD NETWORK VIDEO RECORDER



DIMENSIONS

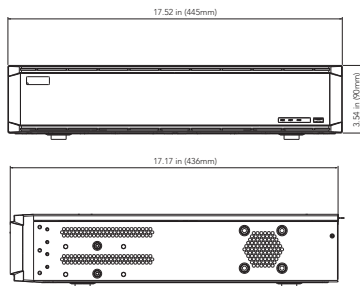

REAR PANEL



AVAILABLE HDD OPTIONS

- 1TB HDD: AVR-HN532E2N-FD-1T
- 2TB HDD: AVR-HN532E2N-FD-2T
- 3TB HDD: AVR-HN532E2N-FD-3T
- 4TB HDD: AVR-HN532E2N-FD-4T
- 6TB HDD: AVR-HN532E2N-FD-6T
- 8TB HDD: AVR-HN532E2N-FD-8T
- 12TB HDD: AVR-HN532E2N-FD-12T
- 16TB HDD: AVR-HN532E2N-FD-16T
- 20TB HDD: AVR-HN532E2N-FD-20T
- 24TB HDD: AVR-HN532E2N-FD-24T
- 28TB HDD: AVR-HN532E2N-FD-28T
- 32TB HDD: AVR-HN532E2N-FD-32T
- 36TB HDD: AVR-HN532E2N-FD-36T
- 42TB HDD: AVR-HN532E2N-FD-42T
- 48TB HDD: AVR-HN532E2N-FD-48T
- 56TB HDD: AVR-HN532E2N-FD-56T
- 64TB HDD: AVR-HN532E2N-FD-64T

MOBILE APP

AVYCON Mobile CVMS



DESCRIPTION AVR-HN532E2N-FD

IP Video Input	32 Channels
Output	HDMI1: 3840 x 2160@60fps / 3840 x 2160@30fps / 1920 x 1080 / 1280 x 1024 / 1024 x 768 HDMI2 / HDMI3 / HDMI4 / VGA x 1: 1920 x 1080 / 1280 x 1024 / 1024 x 768
IP Video Input Resolution	12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 1280X1024 / 960P / 720P / 960H / D1 / CIF
Incoming Bandwidth (Mbps)	640
Outgoing Bandwidth (Mbps)	Display Priority: 128, Network Priority: 640
Video Compression	Standard H.264/ H.265

Network Input	32 Channel IPC Audio Input
Local Output	RCA x 1
2-Way Audio	RCA x 1
HDMI Audio Output	Yes
Compression	G.711(U/A)

Resolution	12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 1280x1024 / 960P / 720P / 960H / D1 / CIF
Frame Rate	25fps(PAL) / 30fps(NTSC)
Record Stream	Dual Stream Recording
Mode	Manual, Timer, Motion, Sensor, Smart Events

Smart Search	Recorded Events are Color-Coded to Reflect the Specific Type of Event that was Recorded (Scheduled, Motion, Alarm, Etc.)
Search	Time slice / Time / Event / Tag Search
Simultaneous Playback	Max 16 Channels
Live/Playback	Channel @ 12MP / 4 Channels @ 5MP / 9 Channels @ 720P / 16 Channels @ 720P
Alarm Input	24 Channels Local Alarm Input; IPC Alarm Input Supported
Alarm Output	8 Channels
Mode	Manual, Sensor, Motion, Exception, Smart Events

Face Detection (Camera Detection)	32 Channels
Face Detection (NVR Detection)	4 Channels
Face Match Performance	16 Channels
Face Picture Database	32 Libraries; 10,000 Face Pictures
Comparison Capability	36 Pictures/second
Face Picture Adding	Ability to Add Face Pictures via Mobile App, Web Interface, and NVR Local GUI
Face Picture Search	Yes
Face Tracking	Yes
Database Management	Add, Modify, Delete, and Search Face Pictures
Face Picture Comparison	Supports Standard Comparison, with the Ability to Add Faces to an Allowed or Blocked List
Face Track Map	Resolution: ≤2560 x 1920; Size: ≤512KB; Formats: .jpg, .jpeg
External Face Picture Enrollment	Resolution: 128 x 128~1920 x 1080; Size: ≤70KB; Formats: .jpg, .jpeg
Face Info Statistic Mode	Statistics by Day, Week, Month, Quarter as well as Customized Time Period
Face Info Statistic Graph	Bar Graph

HDD Interface	SATA x 8, Max 10T per HDD; e-SATA x 1
RAID Type	RAID0, 1, 5, 6, 10

Network Backup	Yes
Local Backup	USB Flash Drive, USB Mobile HDD

Interface	RJ45 10/ 100 / 1,000 Mbps x 2
Protocol	TCP/ IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPS, 802.1x

RS-485	Yes (Full-Duplex), Connect to PTZ or Keyboard
RS-232	Yes
Reset	Yes
Remote Controller	Optional
USB	USB 2.0 x 2, USB 3.0 x 1

Power Supply	ATX 250W
Power Consumption	≤50W (Without HDD)
Working Environment	5°~122°F (-15°~50° Celcius)
Dimensions	430mm × 460mm × 100mm (W × D × H)



AVYCON®

Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

phone: 949-752-7606 / 888-833-4611 (Canada Toll-Free)

email: info@avycon.com

social: [@avycon_aivo](https://www.facebook.com/avycon_aivo)

website: avycon.com