




### Specifications

Power (W)	1 W
Lamp Type	2x2W SMD LED
Input Voltage	120-347 VAC
Frequency	50/60 Hz
LED Type	SMD STRIP
Battery Type	Ni-cd 3.6V
Working Time	120 Minutes
Charging Time	20-24 Hours

### Description

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-retardant
- Wall and side mounting
- Input Voltage: 120-347 VAC 50/60Hz
- Super bright SMD LED 2x2W
- Nickel Cadmium 3.6Volt, 1800mAh Battery
- Test switch and charge indicator light
- Overcharge & Over-discharge protection
- Backup time: ≥120 minutes
- Conversion time: <0.2 second
- IP Class: IP20, suitable for damp locations
- Insulation: II, Range: 80m2 / 860sq.ft
- Suggested Operating Temperature:  
5 °C ~ 30 °C / 41 °F ~86 °F
- One-sided with 3 pictogram inserts

### Dimensions

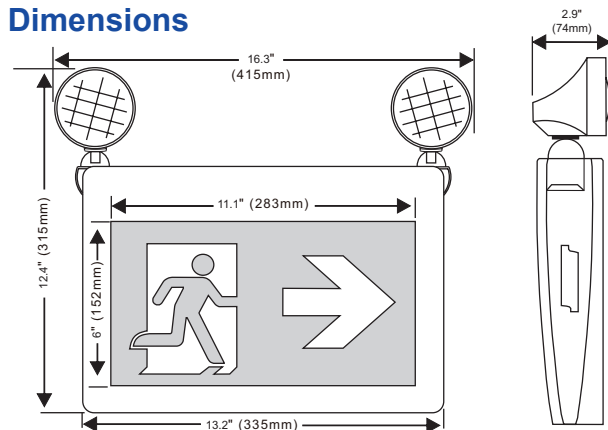

Dimensions are approximate and subject to change.



Unit comes standard with three pictogram legends for direction selection.



### Ordering Information

Model	Description
ELRM-180	LED Running Man Combo

#### Canada

25 Interchange Way Vaughan, ON L4K 5W3  
Telephone: (905) 660-4655 | Fax: (905) 660-4113

#### U.S.A.

4575 Witmer Industrial Estates Niagara Falls, NY 14305  
Toll Free: (888) 660-4655 | Fax Toll Free: (888) 660-4113

www.mircom.com



**THIS INFORMATION IS FOR MARKETING PURPOSES ONLY AND NOT INTENDED TO DESCRIBE THE PRODUCTS TECHNICALLY.**

For complete and accurate technical information relating to performance, installation, testing and certification, refer to technical literature. This document contains intellectual property of Mircom. The information is subject to change by Mircom without notice. Mircom does not represent or warrant correctness or completeness.

**CATALOG NUMBER 4134**

Rev. 1