

## UHF EXTERIOR TAG\*

## installation sheet






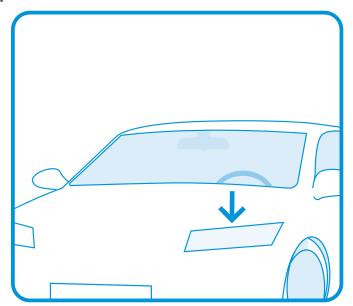


Determine the position of the UHF Exterior Tag on the headlight of the vehicle\*.

Step 2



Clean the surface of the headlight. Make sure the headlight is free of oil and dirt. Degrease and dry the headlight with proper cleaning material.


Step 3

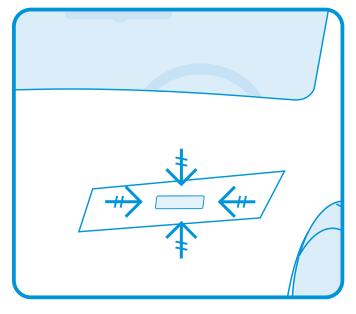


Place the tag in the center of the headlight.



Step 4 Step 5



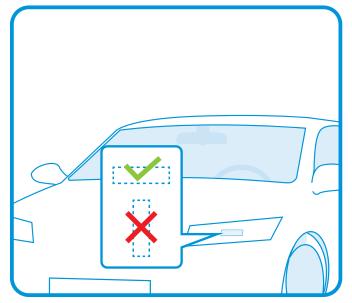

Remove the tag's protection layer before placing the tag on the headlight. The ideal temperature for mounting the tag is in between 10-15 degrees Celsius.

The tag must be placed horizontally on the vehicle's headlight in order to get the best performance. Once correctly installed, the tag is tamper resistant.

## \*Important note

Application of the UHF Exterior Tag on vehicles may be subject to local legislation. Please verify if legal restrictions apply in your region. We advise to mount the tag on the same side as where the long-range reader has been positioned. Compliance with these instructions is important and strongly recommended in order to ensure proper operation of the system.

