

# ES4300A

## Exit Alarm

For applications that require an alarmed exit device for emergency exit doors. The ES4300A is easy to install and operate. The features that make the ES4300A the product of choice, include: Intrusion/Tamper Alarm Output, Remote Reset/Bypass and Field Selectable Alarm Auto Reset.



### FEATURES & BENEFITS


- Aesthetically pleasing design  
Compatible with all access control systems
- Can be used as a stand-alone product
- 12-24 VAC/VDC 200mA operation
- 103 dB alarm sounder
- Easy installation
- Encourages employees to maintain access control procedures
- Reset/Bypass key switch and remote input
- Visual status indicator
- Tamper resistant
- Incorporates Form C output relay
- Compact design - fits in a two gang enclosure




ES4300A-K3-T1

ES4300A Series


**DSI**® 1402 Hawthorne St.  
Bastrop, Texas 78602  
Toll Free: 1-800-272-3555  
Phone: 1-512-321-4426  
Fax: 1-512-321-9181  
E-mail: [dsi@dsigo.com](mailto:dsi@dsigo.com)  
[www.dsigo.com](http://www.dsigo.com)  
DESIGNED SECURITY, INC.  
A Detex Company

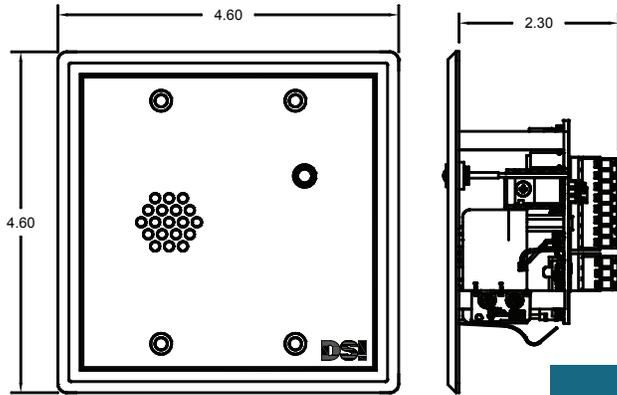


ES4300A-K0-T1

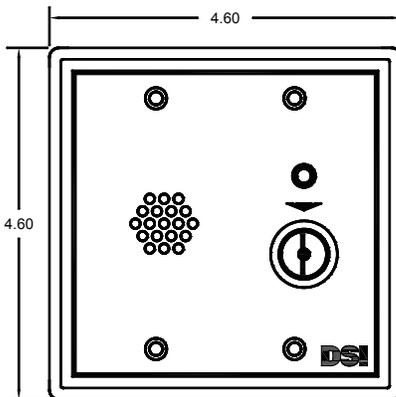

ES4300A-K1-T1

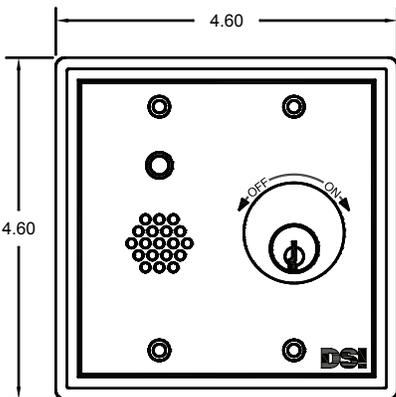

ES4300A-K3-T1

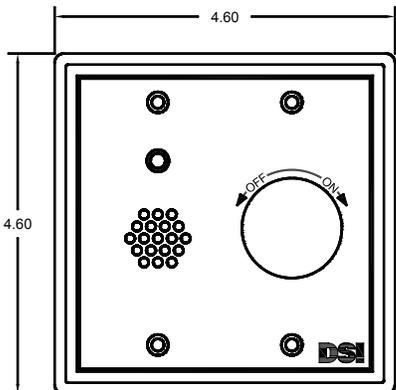

ES4300A-K4-T1

reference dimensional information

## PRODUCT DESCRIPTION

The ES4300A is used to monitor emergency exit doors. Typically located near the door, it monitors door position and activates a sounder and alarm contact when forced entry/exit occurs. Once triggered, the unit remains in alarm until the optional auto reset time expires or reset by the integral key switch or remotely through the dry contact.

## ELECTRICAL SPECIFICATIONS

<b>Power:</b>	12 or 24 VAC/VDC @ 200mA Jumper Selectable
<b>Local Control:</b>	Keyswitch for Unit Reset/Bypass
<b>Control Input:</b>	N/O Remote Reset/Bypass
<b>Control Output:</b>	N/O & N/C Intrusion/Tamper Alarm Status Remote LED
<b>Adjustment:</b>	Alarm Auto Reset 0-60 sec. Shunt Delay (Access/Lock Time) 0-20 sec.
<b>Alarm:</b>	103 db@3 feet

## MECHANICAL SPECIFICATIONS

<b>Dimensions:</b>	ES4300A-K0	4.6" w x 4.6" h x 2.30" d
	ES4300A-K1	4.6" w x 4.6" h x 2.30" d
	ES4300A-K2	4.6" w x 4.6" h x 2.30" d
	ES4300A-K3	4.6" w x 4.6" h x 2.30" d
	ES4300A-K4	4.6" w x 4.6" h x 2.30" d
	ES4300A-K6	4.6" w x 4.6" h x 2.30" d
	ES4300A-K7	4.6" w x 4.6" h x 2.30" d

<b>Key Switch:</b>	Double Bit (K1)	SPST
	Barrel (K2)	SPST
	Rim hardware with cylinder (K3)	DPDT
	Rim hardware without cylinder (K4)	DPDT
	Medeco (K5)	DPDT
	Single bit key switch (K6)	DPDT
	Rim with small format interchangeable core cylinder (SFIC)	DPDT

**Finish:** Painted - DSI Beige

**DSI**<sup>®</sup>  
 DESIGNED SECURITY, INC.  
 A Detex Company

1402 Hawthorne St.  
 Bastrop, Texas 78602  
 Toll Free: 1-800-272-3555  
 Phone: 1-512-321-4426  
 Fax: 1-512-321-9181  
 E-mail: [dsi@dsigo.com](mailto:dsi@dsigo.com)  
[www.dsigo.com](http://www.dsigo.com)