




ENGINEERED ELECTRONICS, INC.

DOME LIGHT 900-151

FEATURES

- * HIGH VISABILITY LENS
- * CEILING OR WALL MOUNT
- * UP TO FOUR SEGMENTED LAMPS
- * LAMPS AVAILABLE IN VARIOUS COLORS



GENERAL DESCRIPTION

The EEI model 900-151, 900-152, 900-153, 900-154 is a corridor dome light which allows the nursing personnel to see which room has placed a call and the status of that call with a glance down the corridor. This device can be ceiling or wall mounted.

ENGINEERS' SPECIFICATIONS

- | | |
|--|--|
| <p>(1) The equipment described shall be manufactured and assembled entirely in the United States of America.</p> <p>(2) All lamps shall be an incandescent type. The lamps shall operate on 24 volts DC.</p> <p>(3) The lens shall attach securely to a two gang plate and should not require any tools to remove lens or replace the lamps.</p> <p>(4) The dome light shall be constructed on a 4 1/2" X 4 1/2" two gang plate without any subassemblies.</p> | <p>(5) The dome light shall be designed to mount on either a single or two gang box.</p> <p>(6) The location of this device shall be as indicated on the prints _____ inches above the finished floor.</p> <p>(7) The dome light shall conform to Underwriters' Laboratory, Inc. listed (U.L. 1069) Standard..</p> |
|--|--|

MODELS

900-151 - 1 Lamp (White)
 900-152 - 2 Lamps (White-Red)

900-153 - 3 Lamps (White-Green-Red)
 900-154 - 4 Lamps (White-Amber-Green-Red)

USEABLE BACK BOXES FOR NEW CONSTRUCTION

Steel City - 225-G, 2G4D, or any type four inch square box with a single or two gang plaster ring.

REV 9/30/05







ACCESSORIES

100-009 - 24 VDC BULB FOR 900-120
100-372 - 24 VDC BULB FOR 900-121-122-123
100-219 - BULB DIVIDER
100-047 - DOME LENS

100-455 - RED BULB COVER
100-456 - BLUE BULB COVER
100-457 - GREEN BULB COVER
100-458 - AMBER BULB COVER

WIRING DIAGRAM

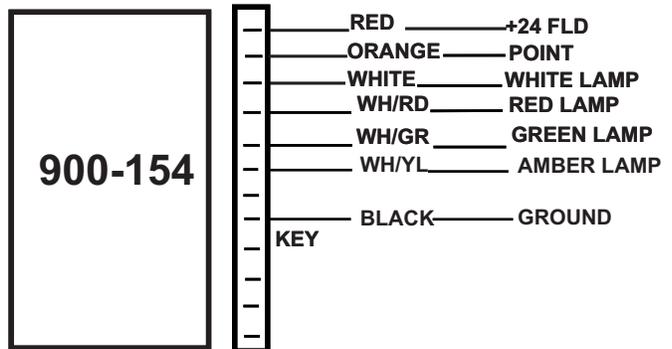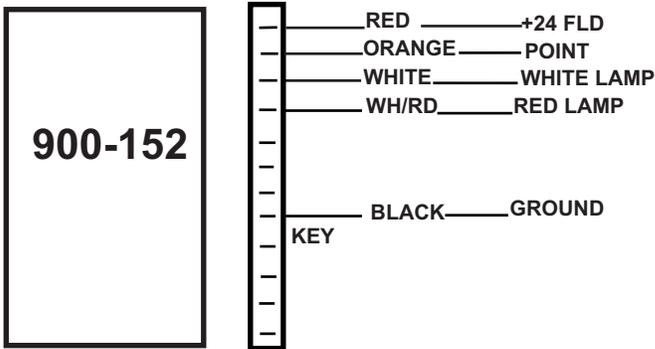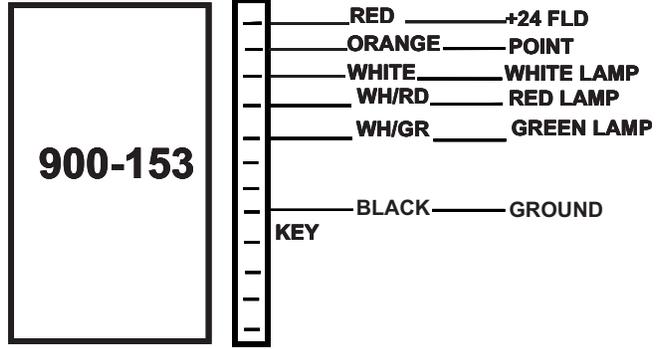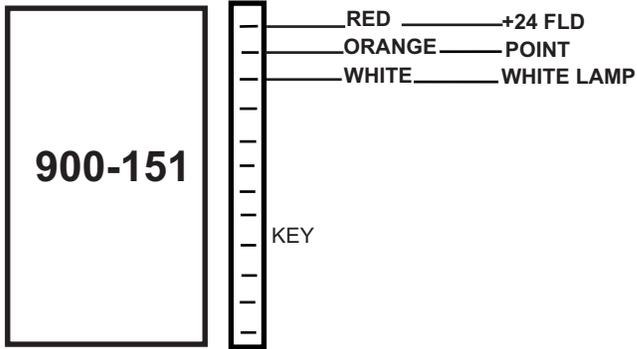

ELECTRICAL CHARACTERISTICS

24VDC
100 mA PER BULB