




ENGINEERED ELECTRONICS, INC.

Annunciator 900-275

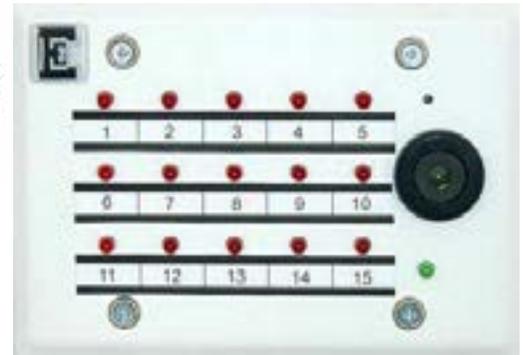

General Description:

The 900-275 Annunciator can be used as a basic 15 LED indicator with a common buzzer, simple system with flash output or visual indicator with 900-203 control panel for DS-2000 systems.

Features:

- * 15 LED indicators
- * Buzzer with volume control
- * Plug-in connections
- * Power on indicator
- * Surface or flush mount
- * Lamp test

Mounting:

Flush: 100-828 3 gang box
 Surface: 100-833 3 gang box

Power Supply:

900-826 24 volts DC 2.5 Amp

Jumpers:

Buzzer controlled by Point input.
 Shunt on H9 (1-2) only.

Buzzer intermittent
 Shunt on H6 (1-2) & Flash Rate select (1-1) slow,
 (2-2) mid, (3-3) fast. H9 is to be left open.

Buzzer controlled by duty output from 900-203
 control panel.
 Shunt on H6 (1-2) only.

To activate from lamp test insert small
 screwdriver through hole above buzzer.

TYPICAL WIRING

