


# 50 Pair 66 Wiring Block Without Bracket

## Package Includes:

A. 50 Pair 66 Wiring Block, 1 PCs

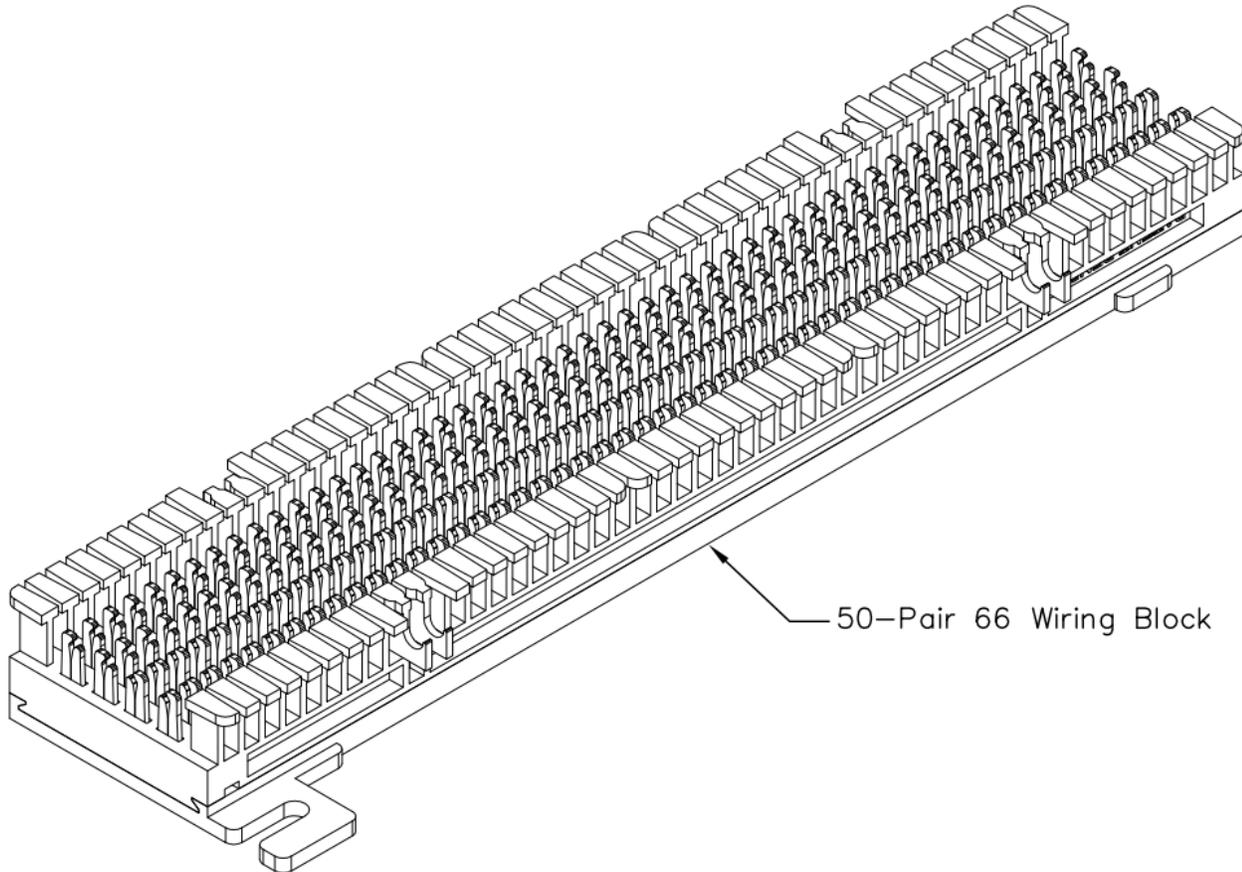

## Features and Benefits

- Designed for voice and data applications
- Exceeds ANSI/TIA-568-C requirements for permanent, channel link and component performances
- Durable and strong high impact flame retardant material
- Mounts on wall or on ICMB89B0WH 898 mounting bracket
- Used with IC066BRCLP 66 wiring block bridging clips, IC066CV050 66 wiring block cover, and IC066LS050 66 wiring block labeling strips
- UL 1863 compliant
- Country Of Origin: Taiwan
- TAA Compliant


Part No: IC066NB050B

Rev: B

Page 1 of 2

| 888-ASK-4ICC | [icc.com](http://icc.com) | [csr@icc.com](mailto:csr@icc.com) |





**NOTE: UNLESS OTHERWISE SPECIFIED**

1. ENVIRONMENTAL CONDITIONS:
  - A. TEMPERATURE STORAGE: -40 TO +70°C
  - B. OPERATIONAL TEMPERATURE: -10 TO +60°C
  - C. RELATIVE HUMIDITY (OPERATIONAL): MAXIMUM NONCONDENSING 93%
2. ELECTRICAL
  - A. ELECTRICAL INSULATION RESISTANCE: 500 MOHMS MIN. @ 100V D.C.
  - B. DIELECTRIC WITHSTANDING VOLTAGE: 1000V RMS @ 60Hz FOR 1 MINUTE
  - C. CONTACT RESISTANCE: 2.5 MOHMS MAX.
3. MECHANICAL
  - A. TRANSVERSE EXTRACTION FORCE
    - i. MINIMUM 5N FOR 24 AWG
    - ii. MINIMUM 3N FOR 26 AWG
  - B. INSERTION/EXTRACTION LIFE: 200 CYCLES MINIMUM
  - C. IDC WIRE GAUGE: 22-26 AWG
4. PHYSICAL
  - A. HOUSING: HIGH-IMPACT, FLAME RETARDANT PLASTIC, UL 94VO
  - B. IDC: BRASS PLATED WITH 100 MICRO-INCH OF Sn

