# 18/4 RISER RATED, UNSHIELDED FIRE ALARM CABLE

## 18 AWG 4 SOLID CONDUCTORS

| | |
|---|---|
| Ratings | FPLR, CL3R, FT4 |
| Approvals | ETL Listed |

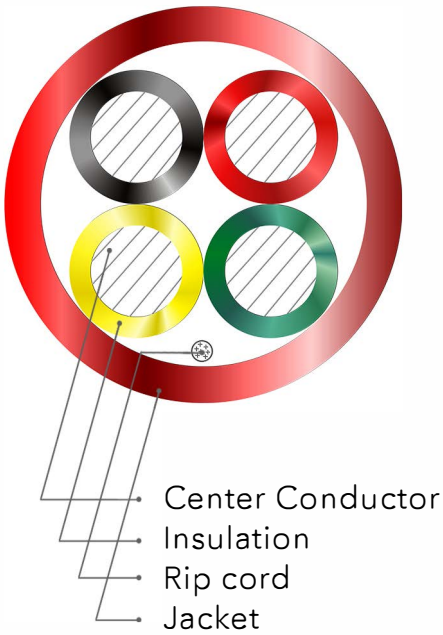


### Construction

| | |
|---|---|
| Conductor | 18 AWG Solid Bare Copper |
| Conductor Count | 4 |
| Insulation | Riser PVC (0.011" nom.) |
| Insulation Colors | Black, Red, Green, Yellow |
| Lay Length | 6.00" nom. |
| Shielding | N/A |
| Rip Cord | Yes |
| Jacket | PVC (0.015"nom.) |
| Overall Diameter | 0.159" nom. |
| Print Legend | ADI PRO P/N RN-200XXXX<br>OXYGEN FREE 4C18 3180662 (ETL)US<br>FPLR 75C ROHS CL3R<br>FT4 LOT#XXXX MMDDYY XXXXFT |

### Properties

| | |
|---|---|
| Operating Voltage | 300 Volts max. |
| DC Resistance | 6.52 Ohms/1000'at 20°C |
| Capacitance | 19.6 pF/ft.nom. |
| Temperature | -20°C to 75°C |
| Flame Rating | UL1666(Riser);<br>CSA C22.2 No. 2556 (FT4) |
| RoHS Compliant | Yes |
| Country of Origin | China |

| PART# | COLOR | LENGTH | BOX |
|---|---|---|---|
| RN-2008106 | Red | 1000Ft. | Express Box |
| RN-2002506 | Red | 500Ft. | Express Box |

Intertek

**For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands**