16/2 PLENUM RATED, UNSHIELDED FIRE ALARM CABLE

16 AWG 2 SOLID CONDUCTORS

Ratings	FPLP, CL3P, FT6
Approvals	ETL Listed

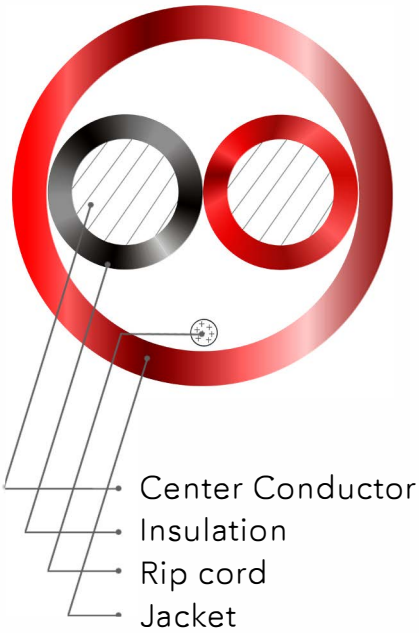

Construction

Conductor	16 AWG Solid Bare Copper
Conductor Count	2
Insulation	Plenum PVC (0.007" nom.)
Insulation Colors	Black, Red
Lay Length	4.25" nom.
Shielding	N/A
Rip Cord	Yes
Jacket	Plenum PVC(0.015" nom.)
Overall Diameter	0.177" nom.
Print Legend	ADI PRO P/N RN-200XXXX OXYGEN FREE 2C16 3180662 (ETL)US FPLP 75C ROHS CL3P FT6 LOT#XXXX MMDDYY XXXXFT

Properties

Operating Voltage	300 Volts max.
DC Resistance	4.1 Ohms/1000'at 20°C
Capacitance	21.2 pF/ft.nom.
Temperature	-20°C to 75°C
Flame Rating	NFPA 262(Plenum); CSA C22.2 No. 2556 (FT6)
RoHS Compliant	Yes
Country of Origin	China

PART#	COLOR	LENGTH	BOX
RN-2007106	Red	1000Ft.	Express Box
RN-2009106	Red	1000Ft.	Wood Reel
RN-2007506	Red	500Ft.	Express Box

Intertek

For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands