16/4 65-STRANDED RISER SPEAKER CABLE, UNSHIELDED

16 AWG 4 Oxygen-Free Bare Copper 65-Stranded Conductors

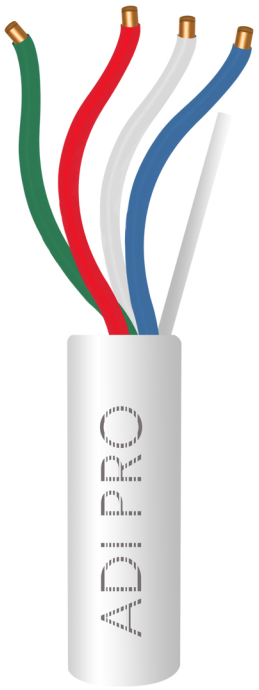

Ratings	CMR, CL3R, FT4
Approvals	ETL Listed

Construction

Conductor	16 AWG Oxygen-Free Bare Copper, 65-Stranded
Conductor Count	4
Insulation	PVC (0.015" nom.)
Insulation Colors	Red, White, Green, Blue
Lay Length	5.5" nom.
Shielding	N/A
Rip Cord	Yes
Jacket	PVC (0.025" nom.)
Overall Diameter	0.294" nom.
Print Legend	ADIPROP/NRN-501XXXXOXYGEN FREE4C163180662(ETL)USCL2R75C ROHSC(ETL)USCMRFT4 500FT

Properties

Operating Voltage	300 Volts max.
DC Resistance	4.19Ohms/1000'at 20°C
Capacitance	39.8pF/ft. nom.
Impedance	57Ohms nom.
Temperature	-20°C to 60°C
Flame Rating	UL 1666 (Riser); CSA C22.2 No. 2556 (FT4)
RoHS Compliant	Yes
Country of Origin	CHINA

PART#	COLOR	LENGTH	BOX
RN-5010502	WHITE	500FT	EXPRESS BOX

RoHS COMPLIANT

Intertek

For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands