8 Port Gigabit Unmanaged Ethernet Switch

0E-8PGIGUN

PRODUCT DESCRIPTION

The 8 Port Gigabit Unmanaged Ethernet Switch is designed to integrate seamlessly with new and existing networks, quickly adding 8 adaptive ports and upgrading to Gigabit speeds. This switch is ideal for applications such as home offices, small networks and schools. All ports support full line speed, non-blocking switching and auto-flip functionality.

FEATURES

- **8 adaptive gigabit Ethernet ports:**
  8 x Gigabit Ethernet ports (RJ45)
- **Quick setup, with plug and play**
- **16 Gbps switching capacity**
- **Port status LED indicator**
- **External power supply**
- **Wall mount type**
- **Energy efficient**
- **Standard: 802.3/802.3u/802.3ab compliant**
- **Limited Lifetime Warranty**

SPECIFICATIONS

PART #	**0E-8PGIGUN**
UPC	811914026433
INPUT POWER	100-240 VAC
TRANSMISSION DISTANCE	328 ft. (100m)
MAC ADDRESS TABLE	4K
SWITCHING CAPACITY	16 Gbps
DIMENSIONS (L x W x H)	5.43″ x 3.11″ x 1″ (138 x 79 x 25mm)
WEIGHT	0.84 lbs. (0.38kg)

Commutateur Ethernet Gigabit non géré à 8 ports

0E-8PGIGUN

DESCRIPTION DU PRODUIT

Ce commutateur Ethernet Gigabit non géré à 8 ports est conçu pour s'intégrer harmonieusement aux réseaux existants ou aux nouveaux réseaux. Il permet d'ajouter rapidement 8 ports adaptatifs et de passer à débits Gigabit. Ce commutateur est idéal pour les applications comme les bureaux à domicile, les petits réseaux et les écoles. Tous les ports prennent en charge la commutation de vitesse de ligne sans entrave et la fonction de retournement automatique de port.

CARACTÉRISTIQUES

- **8 ports Ethernet Gigabit adaptatifs :**
  8 x ports Ethernet Gigabit (RJ45)
- **Configuration rapide, prêt à l'emploi**
- **Capacité de commutation de 16 Go/s**
- **Témoin à DEL d'état de port**
- **Bloc d'alimentation externe**
- **Montage mural**
- **Écoénergétique**
- **Norme : Conforme 802.3/802.3u/802.3ab**
- **Garantie à vie limitée**

SPÉCIFICATIONS

NUMÉRO DE PIÈCE	**0E-8PGIGUN**
UPC	811914026433
PUISSANCE D'ENTRÉE	100 à 240 VCA
DISTANCE DE TRANSMISSION	100 m (328 pi)
TABLE D'ADRESSE MAC	4K
CAPACITÉ DE COMMUTATION	16 Go/s
DIMENSIONS (L x l x H)	138 x 79 x 25 mm (5,43 x 3,11 x 1 po)
POIDS	0,84 lb (0,38 kg)

8 Port Gigabit Unmanaged Ethernet Switch

UltraTech POWER PRODUCTS

ADDITIONAL SPECIFICATIONS

POWER	Power Supply		External Power Supply
	Input Voltage of Power Adaptor		100-240VAC
	Input Voltage of Switch		5VDC
	Consumption		3W
ETHERNET	Speed		Ports 1 to 8: 10/100/1000 Mbps
	Transmission Distance		328 ft. (100m)
NETWORK SWITCH	Ethernet Standard		IEEE 802.3/802.3u/802.3ab
	Switching Capacity		16 Gbps
	Transfer Rate		14,880 pps for 10 Mbps 148,800 pps for 100 Mbps 1,488,000 pps for 1000 Mbps
	MAC Address Table		4K MAC
LINK/ACT INDICATOR	On	Green	Port connecting
	Blinks	-	Port receiving or transmitting data
	Off	-	Port is not successfully linked to device
WORKING ENVIRONMENT	Working Temperature		0 ~ 40°C (32 ~ 104°F)
	Storage Temperature		-40 ~ 70°C (-40 ~ 158°F)
	Humidity Non-Condensing		0 ~ 85%
MECHANICAL	Dimensions (L x W x H)		5.43 x 3.11″ x 1″ (138 x 79 x 25mm)
	Color		Black

PHYSICAL INTERFACE

Front


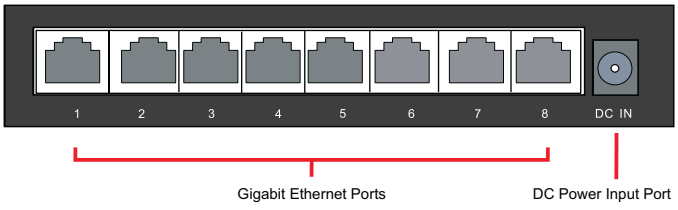
Back