18/2 RISER RATED, UNSHIELDED FIRE ALARM CABLE

18 AWG 2 SOLID CONDUCTORS

Ratings	FPLR, CL3R, FT4
Approvals	ETL Listed

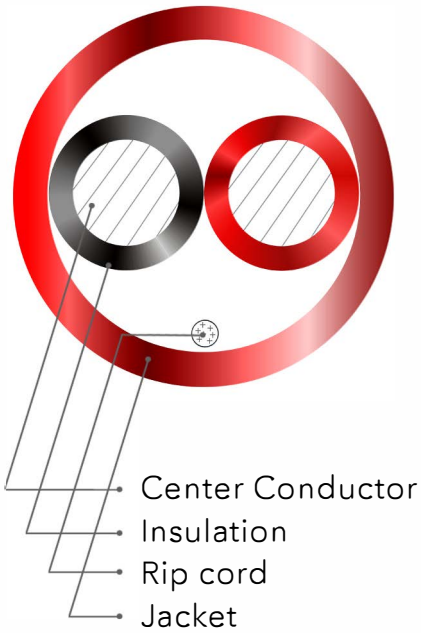

Construction

Conductor	18 AWG Solid Bare Copper
Conductor Count	2
Insulation	Riser PVC (0.011" nom.)
Insulation Colors	Black, Red
Lay Length	2.00" nom.
Shielding	N/A
Rip Cord	Yes
Jacket	PVC(0.015"nom.)
Overall Diameter	0.144" nom.
Print Legend	ADI PRO P/N RN-200XXXX OXYGEN FREE 2C18 3180662 (ETL)US FPLR 75C ROHS CL3R FT4 LOT#XXXX MMDDYY XXXXFT

Properties

Operating Voltage	300 Volts max.
DC Resistance	6.52 Ohms/1000'at 20°C
Capacitance	19.6 pF/ft.nom.
Temperature	-20°C to 75°C
Flame Rating	UL 1666(Riser); CSA C22.2 No. 2556 (FT4)
RoHS Compliant	Yes
Country of Origin	China

PART#	COLOR	LENGTH	BOX
RN-2006106	Red	1000Ft.	Express Box
RN-2006506	Red	500Ft.	Express Box

For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands