18/4 PLENUM RATED, UNSHIELDED FIRE ALARM CABLE

18 AWG 4 SOLID CONDUCTORS

Ratings	FPLP, CL3P, FT6
Approvals	ETL Listed

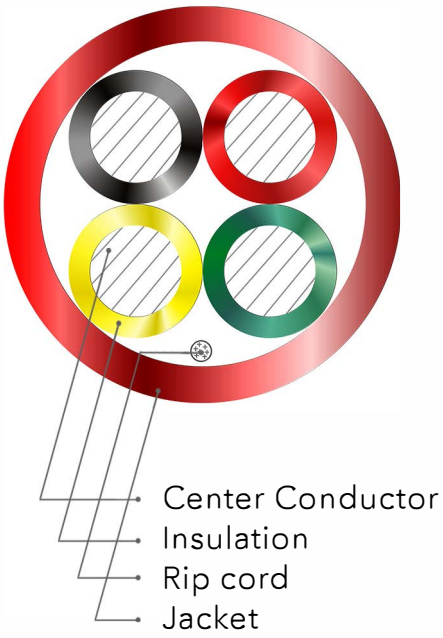

Construction

Conductor	18 AWG Solid Bare Copper
Conductor Count	4
Insulation	Plenum PVC(0.007" nom.)
Insulation Colors	Black, Red, Green, Yellow
Lay Length	4.50" nom.
Shielding	N/A
Rip Cord	Yes
Jacket	Plenum PVC(0.015"nom.)
Overall Diameter	0.157" nom.
Print Legend	ADI PRO P/N RN-200XXXX OXYGEN FREE 4C18 3180662 (ETL)US FPLP 75C ROHS CL3P FT6 LOT#XXXX MMDDYY XXXXFT

Properties

Operating Voltage	300 Volts max.
DC Resistance	6.52 Ohms/1000'at 20°C
Capacitance	25.6 pF/ft.nom.
Temperature	-20°C to 75°C
Flame Rating	NFPA 262(Plenum); CSA C22.2 No. 2556 (FT6)
RoHS Compliant	Yes
Country of Origin	China

PART#	COLOR	LENGTH	BOX
RN-2004106	Red	1000Ft.	Express Box
RN-2004506	Red	500Ft.	Express Box

Intertek

For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands