

# ES4200-723

## FEATURES & BENEFITS

### Service Door Alarm


For service/delivery door applications where an alarmed exit device is required, the ES4200-723 is the right solution for you. This door management alarm helps a store manager maintain the security and safety of their store.



- Aesthetically pleasing design
- Can be used as a stand-alone product or as part of a security system
- Field selectable alarm timing
- 75 dB low level sounder
- 12-24 VDC/VAC operation
- Easy installation
- Encourages employees and delivery personnel to maintain access control procedures
- Reset/bypass keyswitch and remote input
- Visual status indicator
- Tamper resistant
- Intrusion detection
- Incorporates form C output relays
- Supports door supervision

**DSI**<sup>TM</sup>  
DESIGNED SECURITY, INC.  
*A Detex Company*

1402 Hawthorne St.  
Bastrop, Texas 78602  
Voice: 1-800-272-3555  
Fax: 1-512-321-9181  
E-mail: [dsi@dsigo.com](mailto:dsi@dsigo.com)  
[www.dsigo.com](http://www.dsigo.com)

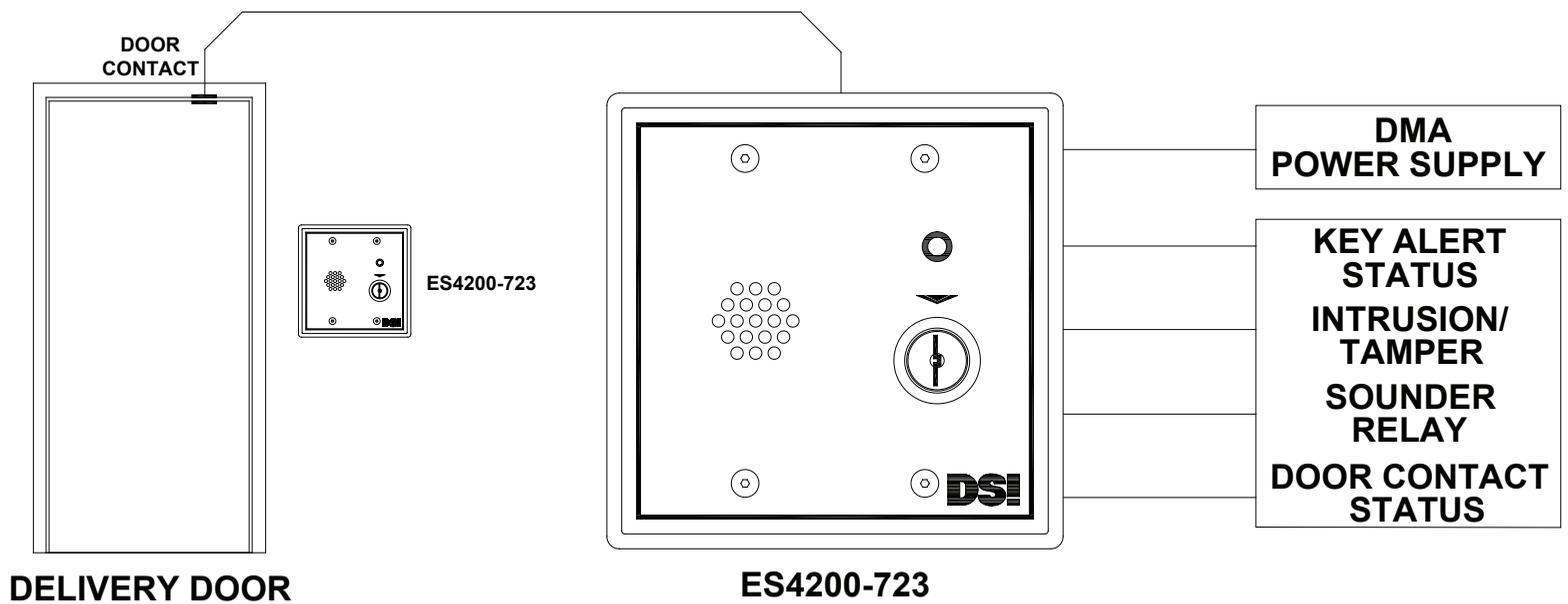

## ELECTRICAL SPECIFICATIONS

Power:	12-24 VDC/VAC @ 250 mA
Local Control:	Keyswitch for Unit Reset/Bypass
Control Input:	N/C Door Contact N/O Remote Reset/Bypass
Control Output:	N/O and N/C Door Contact Status N/O and N/C Alarm Status N/O and N/C Intrusion/Tamper Alarm Status N/O and N/C Key Alert Status Remote LED
Adjustment:	Reset 0 sec. – 5 min. or Manual Reset Key Alert Time Select 0 sec. - 90 min.
Audible Alarm:	Audible Alarm: 75 dB@ 3 ft.

## MECHANICAL SPECIFICATIONS

Dimensions:	2 Gang Plate with Standard Key 4.6"W x 4.5"H x 2.32"D
Keyswitch:	Double Pull Medeco
Finish:	Painted – DSI Beige

## PRODUCT DESCRIPTION

Key controlled bypass puts unit into indefinite bypass, allowing for the door to be propped open for deliveries.

Upon closure of the door and expiration of the key alert timer a reminder alarm will sound until the unit is rearmed with a key.

**DSI**<sup>TM</sup>  
**DESIGNED SECURITY, INC.**  
*A Detex Company*

**1402 Hawthorne St.**  
**Bastrop, Texas 78602**  
**Voice: 1-800-272-3555**  
**Fax: 1-512-321-9181**  
**E-mail: [dsi@dsigo.com](mailto:dsi@dsigo.com)**  
**[www.dsigo.com](http://www.dsigo.com)**